


### DAF Miracle Mount is a High Quality Optically Clear Mounting Adhesive

This unique “second surface” mounting solution has two optically clear pressure-sensitive adhesives protected on each side by a polyester release liner. Simply adhere printed images to the permanent acrylic adhesive and then, face mounting, apply the other Siliconized adhesive side to clear Glass, Acrylic, Plexiglass™ or Polycarbonate.

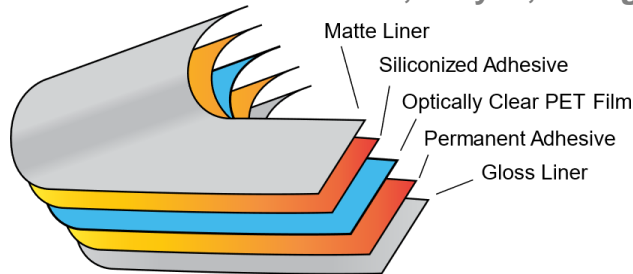

#### Layered Construction:

1. Inner face = Frosted Matte 50 micron PET release liner
2. Inner-middle = Optically clear silicone glue
3. Middle = 75 micron optically clear PET film
4. Outer-middle = Optically clear, Permanent acrylic pressure sensitive adhesive.
5. Outer face = Clear 25 micron PET release liner

#### Key Features & Benefits:

- Unique Optically Clear Siliconized Low Tack adhesive for easy on/off Window Graphics.
- Can be installed by non-professionals. Removes easily without leaving any adhesive residue.
- Put-up, 54"x100'.
- Shelf Life: 1 year (stored up to 25°C and 50% relative humidity), in original packing.

#### Applications:

- Use as a mounting adhesive where see-through or optical clarity is required such as window advertisements or other clear displays.
- Use with DAF Companion product Polypropylene B/O 2-Side Printable. Mounting Retail and POP/POS.

#### Installation of larger graphics and images:

1. **The product should be installed dry** to the inside of glass i.e. second surface.
2. Clean Glass with Alcohol. **Do not try to install over Dirt, Dust or Edge chalking.**
3. Align graphic to window with the protective liner facing toward glass and hinge with tape on the left and right edges about and 2 feet below top of the panel.
4. Flip the top of graphic down and peel liner away from graphic to hinge point and cut just the liner away with razor knife slightly above hinge point.
5. Start applying graphic to the glass by working up from hinge point with a felt squeegee.
6. Once the top of the graphic is applied remove the tape on the left and right.
7. To finish the application, now flip the bottom of the graphic up to the edge of the liner that was previously trimmed away. Peel the liner away from the graphic exposing another two feet of the graphic and apply to glass working from top down. Continue to apply to the glass in this manner until the entire graphic is installed.